

SPR-132A/172A/692A

Reference Series Coaxial Speakers

FEATURES


Woofers

Low Distortion Magnet Circuit
Rubber Surround
Hybrid Composite Resin Cone
Gold Plated Terminals


Tweeters

Feather Light Silk Soft Dome
Neodymium Magnet


SPR-132A

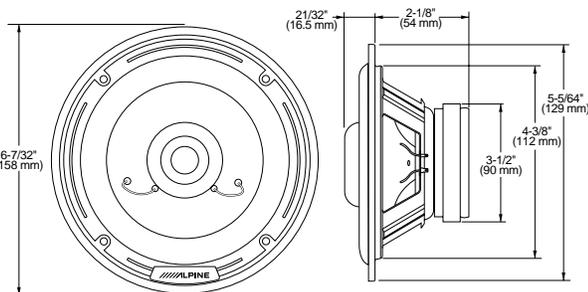

SPR-172A

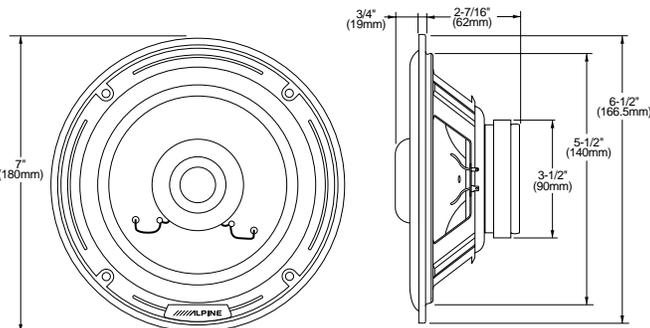

SPR-692A

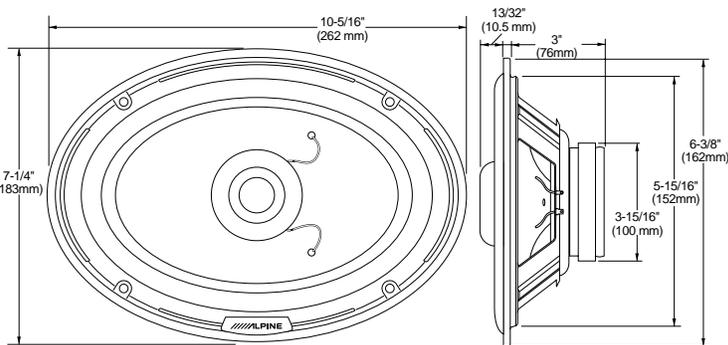

SPECIFICATIONS

SPR-692A

Impedance(Nominal) 4 ohms
Power Handling Capacity 180watts peak(50watts RMS)
Frequency Response 35Hz—30kHz
Sensitivity 92dB/W/m
Mounting Depth 76mm(3in.)
Mounting Diameter 219mmx149mm(8-5/8in.x5-7/8in.)
Magnet Weight 0.45kg(16oz.)

SPR-172A

Impedance(Nominal) 4 ohms
Power Handling Capacity 150watts peak(40watts RMS)
Frequency Response 40Hz—30kHz
Sensitivity 91dB/W/m
Mounting Depth 62mm(2-7/16in.)
Mounting Diameter 140mm(5-1/2in.)
Magnet Weight 0.35kg(12oz.)

SPR-132A

Impedance(Nominal) 4 ohms
Power Handling Capacity 120watts peak(35watts RMS)
Frequency Response 50Hz—30kHz
Sensitivity 90dB/W/m
Mounting Depth 54mm(2-1/8in.)
Mounting Diameter 112mm(4-3/8in.)
Magnet Weight 0.35kg(12oz.)